

cascade connection upto 16 boilers superior safety systems high efficiency condensing boilers **109% efficiency**
hot water temperature safety over 95 Coenvironmental friendly high modulation ration **low flue gas temperature**
42kW to 2200kW capacity range fully automatic operation control and operation over the internet with web-server **NOx class 5**
CE certified compact design – high efficiency **automatic frost protection function**

Gassero

technology for your comfort

Creating highly efficient condensing water heating solutions is not easy.
In Gassero we specialize in designing and producing wide range of high capacity Condensing Boilers with high efficiency and automation level utilizing newest available technology available on the market today.



- Upto 16pcs Cascade Connection
- Stainless Heat Exchanger
- CE Certified
- NOx Class 5



Wallcon 160kW

109% efficiency
1:7 modulation ratio

Wallcon 125kW

108.2% efficiency
1:7 modulation ratio

Wallcon 42kW

106.8% efficiency
1:5 modulation ratio

Wallcon 50kW

106.9% efficiency
1:6 modulation ratio

Wallcon 67kW





107.9% efficiency
1:4 modulation ratio

Wallcon 115kW

108.4% efficiency
1:4 modulation ratio



Dimensions & Connections

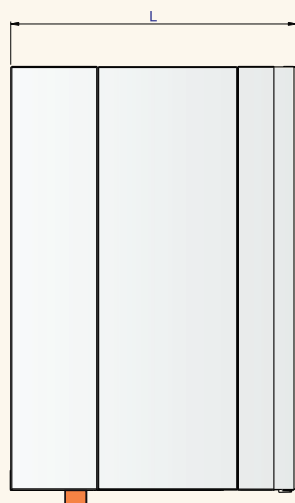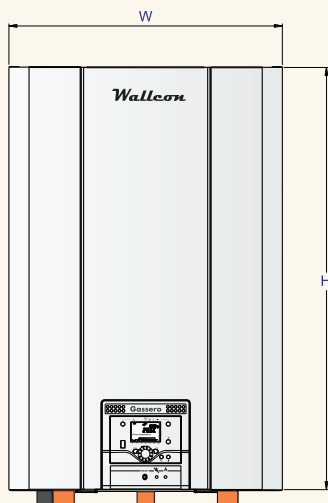

WALLCON 42-50 kW

Sc : Condensate drain - 25mm
 Sr : Safety drain - 1/2"
 M : Flow 1"
 R : Return 1"
 G : Gas inlet 3/4"
 Fd : Flue outlet 80mm
 Ad : Air intake 80mm
 W x L x H = 446 x 390 x 654

WALLCON 67 kW

Sc : Condensate drain - 25mm
 Sr : Safety drain - 1/2"
 M : Flow 1"
 R : Return 1"
 G : Gas inlet 3/4"
 Fd : Flue outlet 80mm
 Ad : Air intake 80mm
 W x L x H = 446 x 480 x 654


WALLCON 160 kW

Sc : Condensate drain - 25mm
 Sr : Safety drain - 1/2"
 M : Flow 1 1/4"
 R : Return 1 1/4"
 G : Gas inlet 1"
 Fd : Flue outlet 100mm
 Ad : Air intake 100mm
 W x L x H = 557 x 690 x 860



WALLCON 115-125 kW

Sc : Condensate drain - 25mm
 Sr : Safety drain - 1/2"
 M : Flow 1 1/4"
 R : Return 1 1/4"
 G : Gas inlet 1"
 Fd : Flue outlet 100mm
 Ad : Air intake 100mm
 W x L x H = 557 x 580 x 865

Cascade Installation Example

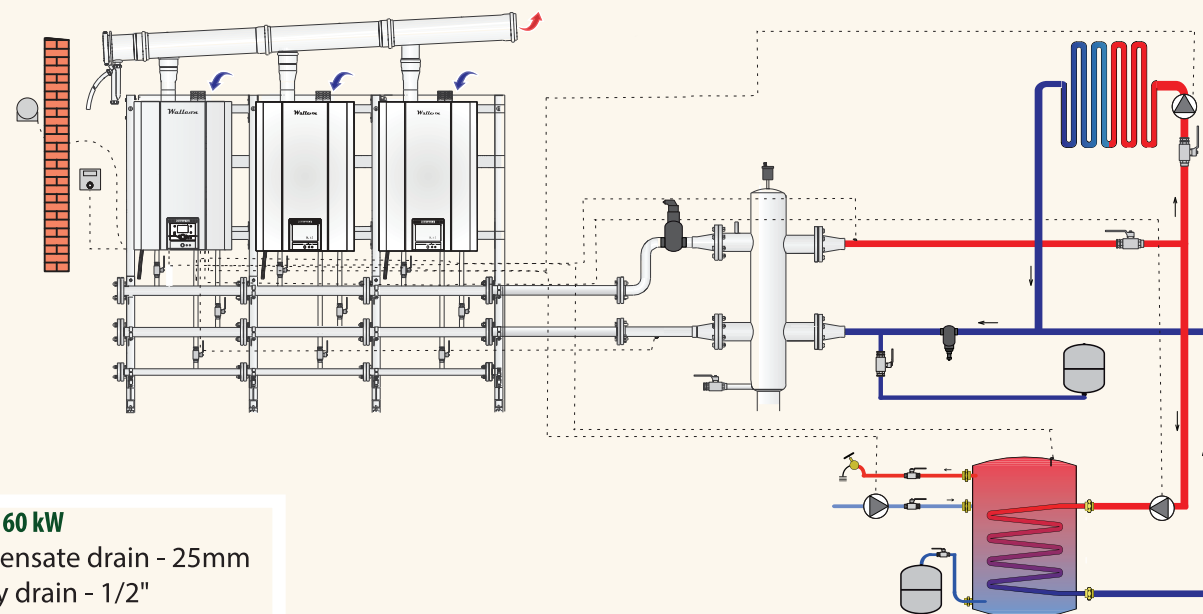

- Upto 16pcs Cascade Connection
- Aluminum Heat Exchanger
- CE Certified
- NOx Class 5

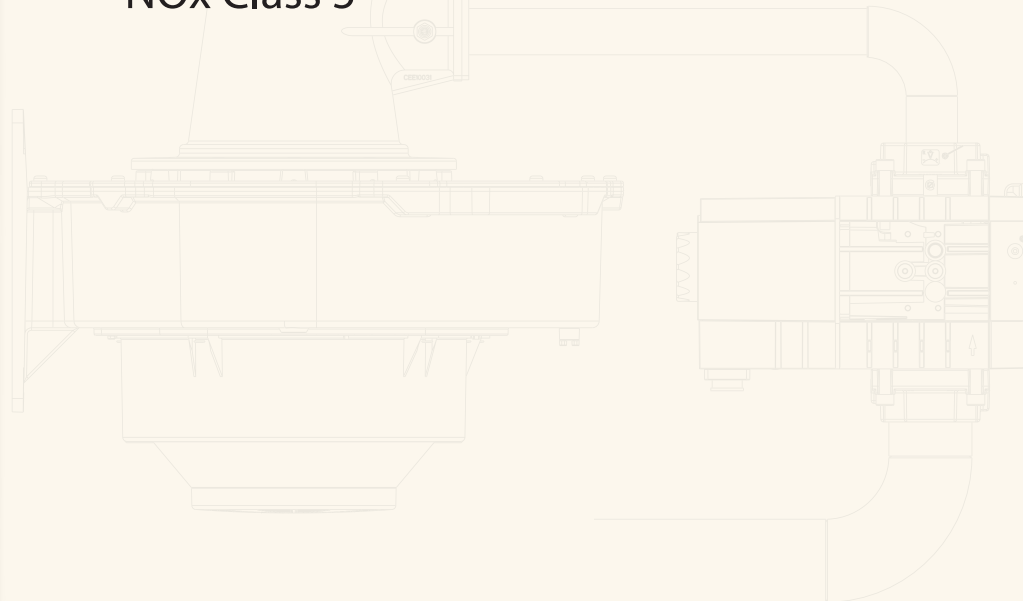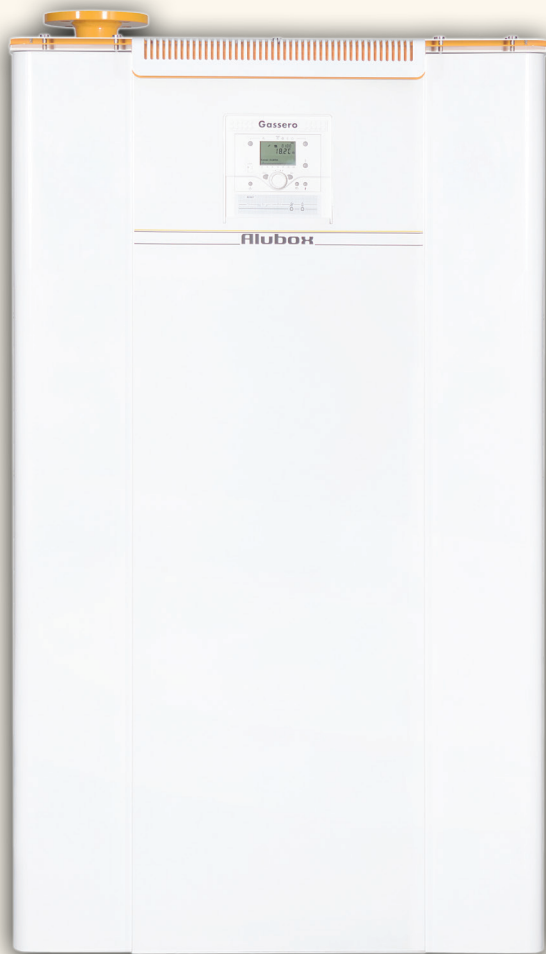

Alubox 2200kW

108% efficiency
1:14 modulation ratio

Alubox 1100kW

108% efficiency
1:7 modulation ratio

Alubox 700kW

108.6% efficiency
1:6.5 modulation ratio

Alubox 150kW

102% efficiency
1:6 modulation ratio

Alubox 208kW

107.4% efficiency
1:6 modulation ratio

Alubox 290kW


107.3% efficiency
1:6 modulation ratio

Alubox 540kW

106.7% efficiency
1:6.5 modulation ratio



Dimensions & Connections

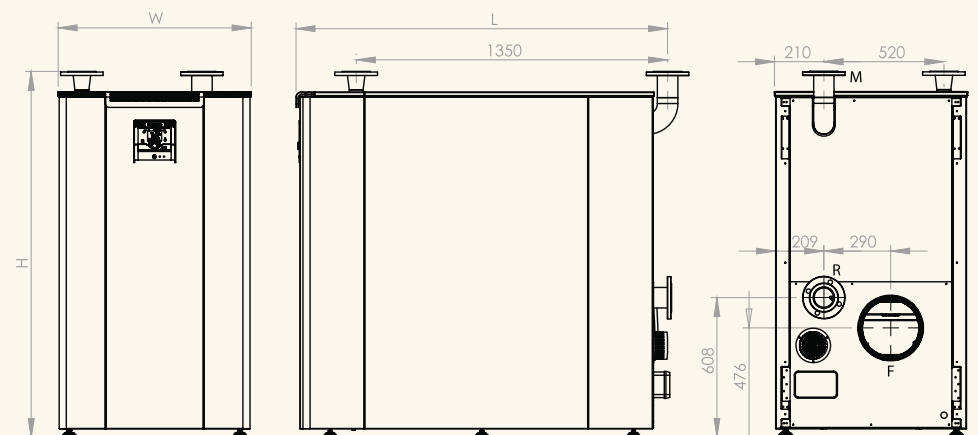

ALUBOX 208/290


M : Water outlet connection: 2"

F : Flue diameter: Ø200 mm

R : Water inlet connection: 2"

G : Gas inlet: 1 1/4"

W : 645 L : 1420 H : 1350

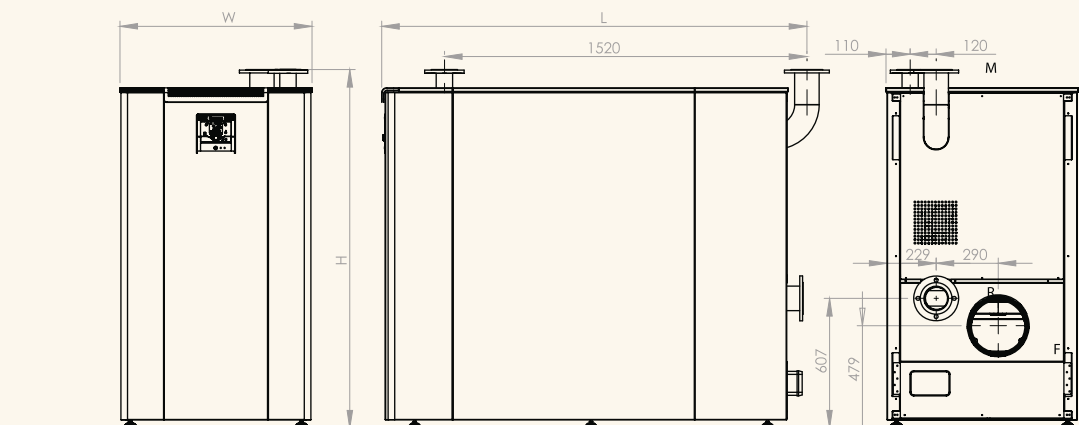

ALUBOX 1100


M : Water outlet connection: 4"

F : Flue diameter: Ø250 mm

R : Water inlet connection: 4"

G : Gas inlet: 2 1/2"

W : 898 L : 1993 H : 1720

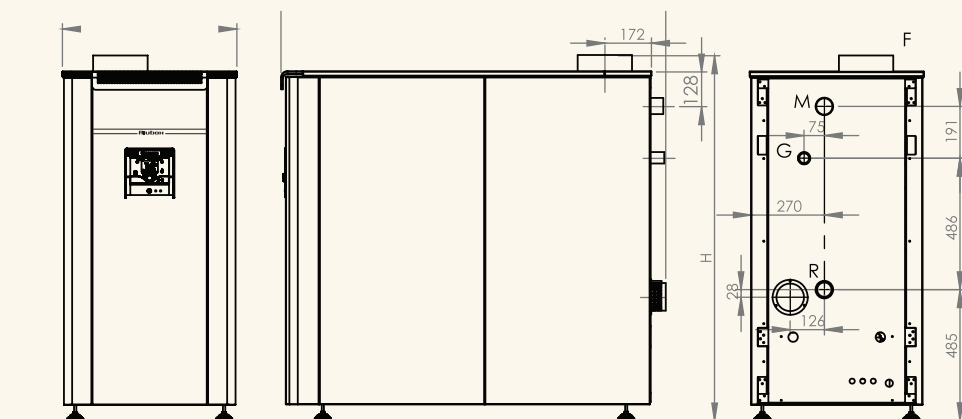

ALUBOX 540/700


M : Water outlet connection: 3"

F : Flue diameter: Ø250 mm

R : Water inlet connection: 3"

G : Gas inlet: 2 1/2"

W : 838 L : 1600 H : 1590

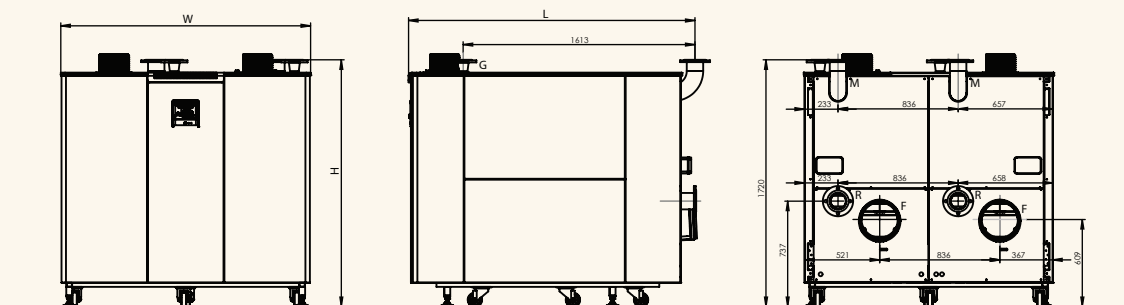

ALUBOX 2200

M : Water outlet connection: 4"

F : Flue diameter: Ø250 mm

R : Water inlet connection: 4"

G : Gas inlet: 2 1/2"

W : 1738 L : 1993 H : 1720





- Upto 16pcs Cascade Connection
- Stainless Heat Exchanger
- CE Certified
- NOx Class 5



Superbox 160kW

109% efficiency
1:7 modulation ratio

Superbox 260kW

106% efficiency
1:10 modulation ratio

Superbox 530kW


106 efficiency
1:10 modulation ratio

Superbox 1060kW

106% efficiency
1:20 modulation ratio




Dimentions & Connections

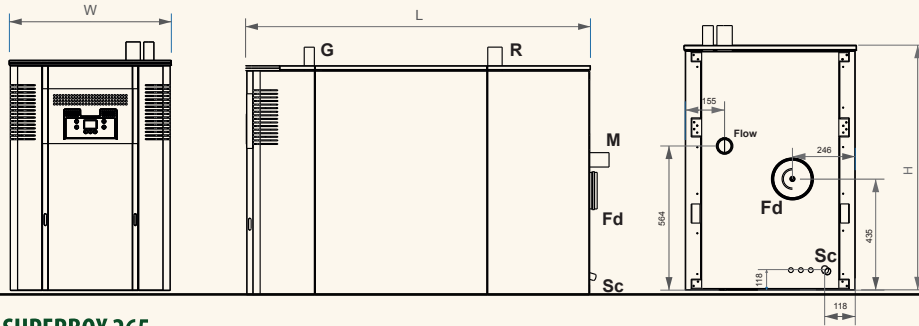

SUPERBOX 265


M : Water outlet connection: 2"
R : Water inlet connecton: 2"
W : 640 L: 1560 H: 1140

F : Flue damer: Ø150 mm
G : Gas inlet: 1 1/4"

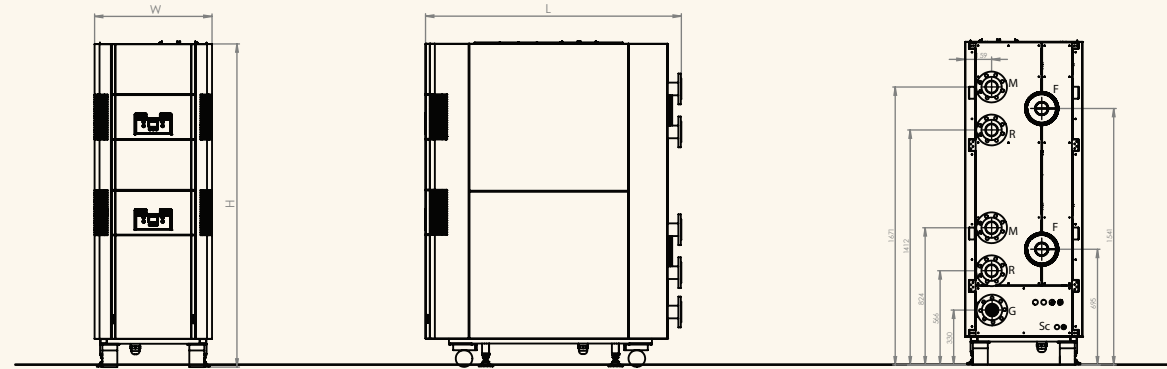


SUPERBOX 1060 V

M : Water outlet connection: 2 1/2" F : Flue damer: Ø180 mm
R : Water inlet connecton: 2 1/2" G : Gas inlet: 2"
W : 715 L: 1560 H: 1942

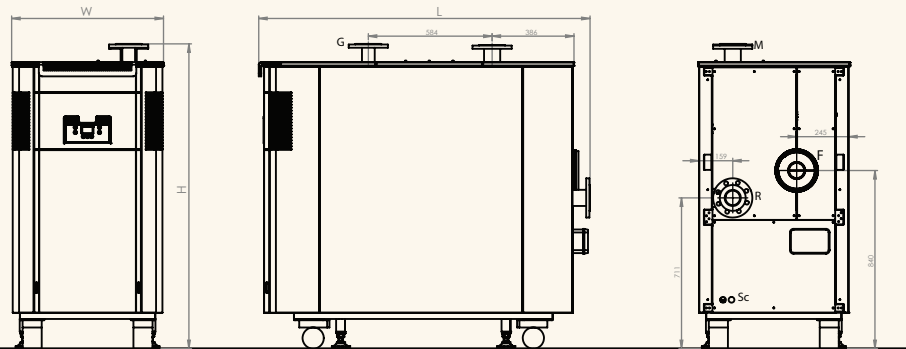

SUPERBOX 530

M : Water outlet connection: 2 1/2" F : Flue damer: Ø180 mm
R : Water inlet connecton: 2 1/2" G : Gas inlet: 1 1/4"
W : 715 L: 1560 H: 1430

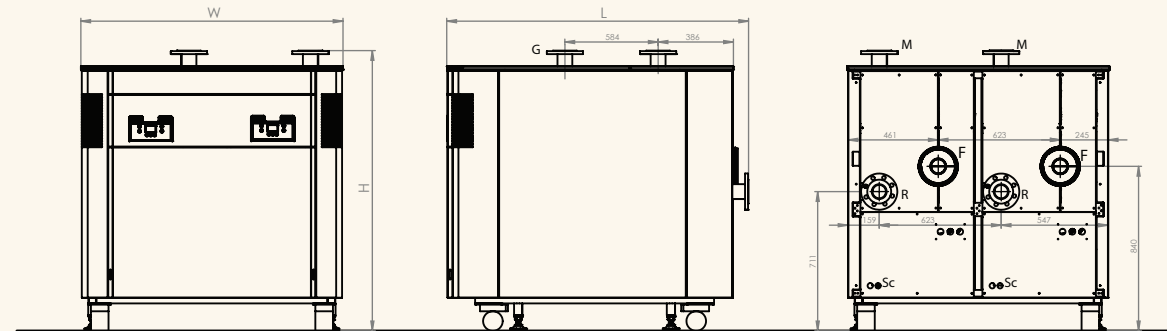

SUPERBOX 1060 H

M : Water outlet connection: 2 1/2" F : Flue damer: Ø180 mm
R : Water inlet connecton: 2 1/2" G : Gas inlet: 2"
W : 1340 L: 1560 H: 1430

Gassero

technology for your comfort

Gassero Isi Teknolojileri San. Ltd.

Istanbul Endustri ve Ticaret Serbest Bolgesi (Free Zone)
4. Sokak, Parsel NO. 110, 34957, Tuzla, Istanbul, Turkey

T : +90 216 394 09 85
F : +90 216 394 24 91

www.gassero.com
export@gassero.com